



Measuring transducer for current or voltage

-standard types-



- A1U 2.3
- V1U 2.3
- AUD 2.3
- VUD 2.3
- AUE 2.3
- VUE 2.3
- TUA 2.3

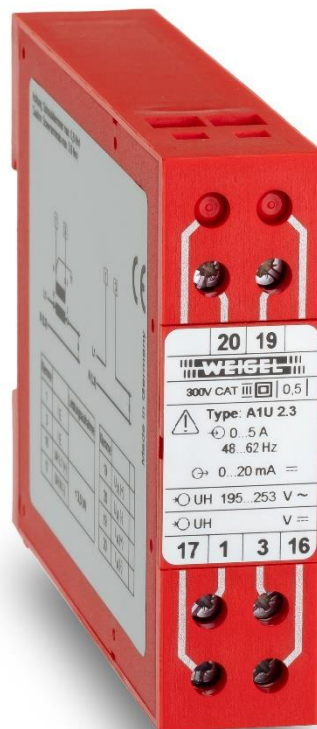

Application

The transducers of the 2.3 series convert existing currents or voltages polarity-true into a load independent DC current or an impressed DC voltage. The output signal can be indicated, recorded and/or used for controlling directly at the test point or in measuring facilities located far away. The range of transducers includes types for sinusoidal resp. non-sinusoidal AC signals as well as DC signals. It is possible to connect more than one indicator, recorder, controller, computer etc. to the output circuit provided the total impedance does not exceed the rating.

Power supply is effected by a separate auxiliary voltage input. Input, output and auxiliary voltage input are galvanically isolated from each other. The outputs are short-circuit proof and safe against idling.


The measuring transducers are intended for installation in plants, devices or switchboards. The regulations regarding the construction of those electrical systems must be observed.

Operating Principle

Current measurement is effected by means of a shunt, voltage measurement by means of a voltage divider.

The signal will then be galvanically isolated from input via an optical path and converted into a proportionally impressed DC voltage or into a load independent DC current proportional to the input signal.

Block Circuit Diagram

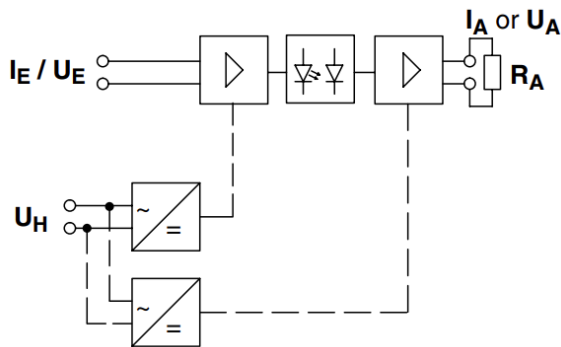


notice:


Input, output and auxiliary voltage are galvanically isolated from each other.

Connections

Current types

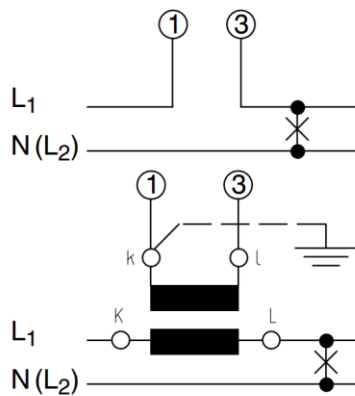

Voltage types

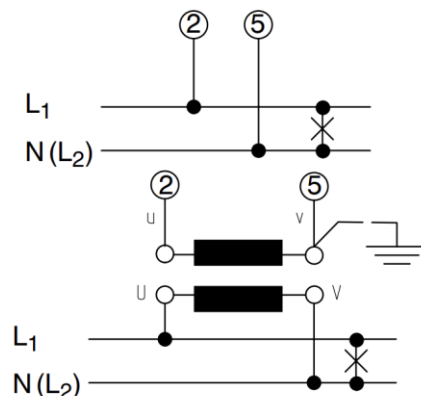

Inputs –Types

type	input quantities	rated input value
A1U 2.3	sinusoidal AC current	0 - 200 μ A to 0 - 10 A
V1U 2.3	sinusoidal AC voltage	0 - 60 mV to 0 - 519 V
AUD 2.3	DC current	0 - 200 μ A to 0 - 5 A
VUD 2.3	DC voltage	0 - 60mV to 0 – 300 V
AUE 2.3	non-sinusoidal AC current (true RMS value)	0 - 200 μ A to 0 - 5 A
VUE 2.3	non-sinusoidal AC voltage (true RMS value)	0 – 60 mV to 0 – 519 V
TUA 2.3	DC standard signals	0 – 20 mA, 4 – 20 mA, 0 – 10 V, 2 – 10 V, 0 – 60 mV

frequency range	A1U 2.3, V1U 2.3: 48 ... 62 Hz AUE 2.3, VUE 2.3: DC / 40-1000 Hz	
crest factor (AUE 2.3 / VUE 2.3)	≤ 4 (peak value / rms value)	
input resistance	VUD 2.2 $U_{EN} > 20$ V VUE 2.2 $U_{EN} > 30$ V TUA 2.2 $U_{EN} = 60$ mV approx. 2 k Ω /V	VUD 2.2 $U_{EN} \leq 20$ V VUE 2.2 $U_{EN} \leq 30$ V TUA 2.2 $U_{EN} = 10$ V approx. 33 k Ω /V
RE		
power consumption	IE x 0,1 V on voltage input U_E^2 / R_E on voltage input	
operating voltage	519 V AC max, 300 V DC (300 V CAT III)	
overloads	current	voltage
modulation range	1,2 I _{EN}	1,2 U _{EN}
overload limit	1,2 I _{EN} continuously. 20 I _{EN} max. 1 s	1,2 U _{EN} continuously 2 U _{EN} max. 1 s

Outputs

current output

output current I _A	load independent DC current (0 ... 20 mA)
rated current I _{AN}	0 ... 20 mA or 4 ... 20 mA
load range R _A	0 ... 500 Ω
current limitation	to 140...150 % of end value


voltage output

output voltage U _A	impressed DC voltage (0 ... 12 V)
rated voltage U _{AN}	0 ... 10 V or 2 ... 10 V
load R _A	≥ 4 k Ω

current / voltage output

load error	$\leq 0,1$ % at 50 % load change
residual ripple	$\leq 1\%$ rms
idling voltage	≤ 15 V


Conversion Characteristics

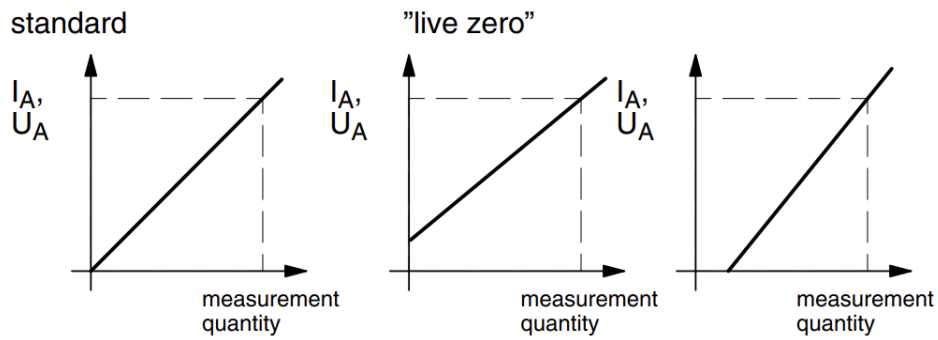

Auxiliary Supply

power supply	auxiliary voltage	Power consumption
1	230 V~ (195 ... 253 V), 48 ... 62 Hz	< 3.5VA
2	115 V~ (98...126 V), 48 ... 62 Hz	< 3.5VA
3	24 V= (21.6 ... 26.4 V)	< 2 VA


Terminal Assignment

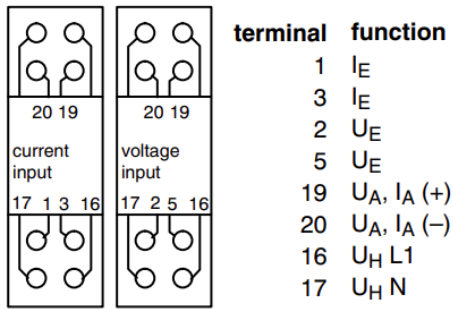

I_E current input
 U_E voltage input
 The terminal numbering correspond to details in the connection diagrams (to DIN 43 807).

I_A current output
 U_A voltage output
 U_H auxiliary voltage input

Dimensions

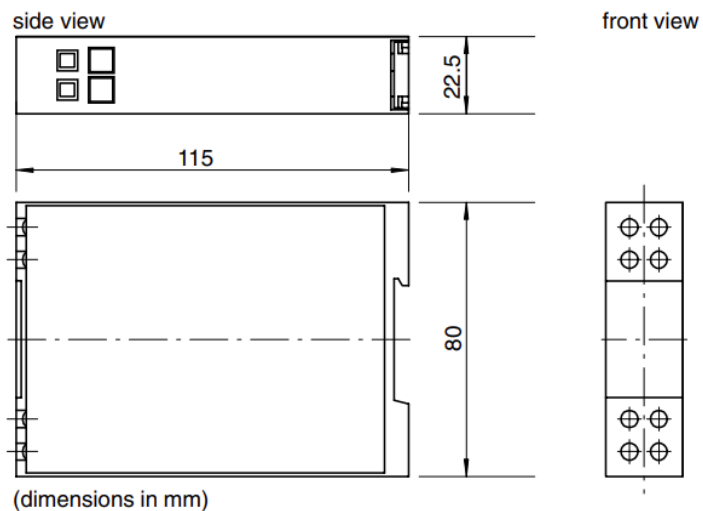

General technical data

Design	Surface-mounted housing for snap mounting on DIN rail TH 35 according to DIN EN 60 715
Case material	ABS/PC red self-extinguishing according to UL 94 V-0
connections	Screw terminals, max. torque 0.8 Nm
Wire cross section	max. 4 mm ²
Protection class	IP 30 housing IP 20 terminals
Test voltages	Measuring circuit and auxiliary voltage against output: 3510 Vrms 5 sec Measuring circuit and auxiliary voltage against housing: 3510 Vrms 5 sec Output against housing: 2210 Vrms 5 sec
Working voltage	300 V (nominal line voltage phase-zero)
Protection class	II
Measurement category	CAT III
Pollution level	2
Dimensions	22.5 mm x 80 mm x 115 mm
Weight	140 g
Sealevel of the place of use	max. 2000 m above sea level

Accuracy at reference conditions

accuracy class	0.5 (± 0,5 % of end value)
temperature coefficient	≤ 0,02 % / K, valid for standard products and a life-period of 1 year maximum

reference conditions	
input voltage	UEN ± 2 %
frequency	45 ...62 Hz ± 1%, harmonic content 0.05
auxiliary voltage	UHN ± 2 %, 50...60 Hz
ambient temperature	23°C ± 1 K
warm up time	≤ 5 min

Environmental conditions

Climate suitability	Climate class 3 according to VDE/VDI 3540 sheet 2
Working temperature range	-10 ... +55 °C
Storage temperature range	-25 ... +65 °C
Relative humidity	≤ 75 % annual average, no condensation Only use the device indoors

Ordering Guide A1U 2.3 / V1U 2.3

Order number		
IMU22-	A1U 2.3	
UMU23-	V1U 2.3	
	Input	
	A1U 2.3	V1U 2.3
1	0...200 µA	0...60 mV
2	0...20 mA	0...1 V
3	0...0,5 A	0...10 V
4	0...1 A	0...115 V
5	0...2 A	0...230 V
6	0...5 A	0...400 V
7	0...10 A	0...500 V
9	special range up to 10 A	special range up to 519 V
	Frequency range input	
2	48...62 Hz	
	Output	
1	0...20 mA	
2	4...20 mA	
3	0...10 V	
4	2...10 V	
5	0...12 V (without overload)	
	Auxiliary supply	
1	AC 230 V (195...253 V), 48...62 Hz *)	
2	AC 115 V (98...126 V), 48...62 Hz	
3	DC 24 V (21,6...26,4 V)	
	Manufacturing certificate	
0	without *)	
1	with	

*) standard

Order example:

Sinusoidal AC transmitter A1U2.3, input current rating: 1 A, frequency range: 50/60 Hz, Output: 4-20 mA, auxiliary power: 24 V, without test protocol.

Item number according to number code: IMU22-42230

Ordering Guide AUD 2.3 / VUD 2.3

Order number		
IMU24-	AUE 2.3	
UMU25-	VUE 2.3	
	Input	
	AUE 2.3	VUE 2.3
1	0...200 µA	0...60 mV
2	0...20 mA	0...1 V
3	0...0,5 A	0...10 V
4	0...1 A	0...115 V
5	0...2 A	0...230 V
6	0...5 A	0...400 V
7	0...10 A	0...500 V
9	special range up to 10 A	special range up to 519 V
	Frequency range input	
6	DC / 40...1000 Hz	
	Output	
1	0...20 mA	
2	4...20 mA	
3	0...10 V	
4	2...10 V	
	Auxiliary supply	
1	AC 230 V (195...253 V), 48...62 Hz *)	
2	AC 115 V (98...126 V), 48...62 Hz	
3	DC 24 V (21,6...26,4 V)	
	Manufacturing certificate	
0	without *)	
1	with	

*) standard

Order example:

Transmitter for DC voltage VUD2.3, Nominal input current: 1 V, Frequency range: DC, Output: 4-20 mA, auxiliary power: 24 V, without test protocol.

Item number according to number code: UMU27-20230

Ordering Guide AUE 2.3 / VUE 2.3

Order number		
IMU26-	AUD 2.3	
UMU27-	VUD 2.3	
	Input	
	AUD 2.3	VUD 2.3
1	0...200 µA	0...60 mV
2	0...20 mA	0...1 V
3	0...0,5 A	0...10 V
4	0...1 A	0...115 V
5	0...2 A	0...230 V
6	0...5 A	-
9	special range up to ±5 A	special range up to ±300 V
	Frequency range input	
0	DC	
	Output	
1	0...20 mA	
2	4...20 mA	
3	0...10 V	
4	2...10 V	
	Auxiliary supply	
1	AC 230 V (195...253 V), 48...62 Hz *)	
2	AC 115 V (98...126 V), 48...62 Hz	
3	DC 24 V (21,6...26,4 V)	
	Manufacturing certificate	
0	without *)	
1	with	

Order example:

Transmitter for non-sinusoidal alternating current (true RMS measurement) AUE2.3, Input current rating: 1 A, Frequency range: DC, Output: 4-20 mA, Auxiliary power: 24 V, without test protocol.

Item number according to number code: IMU24-46230

Ordering Guide TUA 2.3

Order number	
NMU33-	TUA 2.3
	Input
1	0...20 mA
2	0...10 V
3	4...20 mA
4	2...10 V
5	0...60 mV
	Frequency range input
0	DC
	Output
1	0...20 mA
2	4...20 mA
3	0...10 V
4	2...10 V
	Auxiliary supply
1	AC 230 V (195...253 V), 48...62 Hz *)
2	AC 115 V (98...126 V), 48...62 Hz
3	DC 24 V (21,6...26,4 V)
	Manufacturing certificate
0	without *)
1	with

*) standard

Order example:

Transmitter for DC standard signals TUA2.3, nominal input current: 10 V, frequency range: DC, output: 4-20 mA, auxiliary power: 24 V, without test protocol.

Item number according to number code: NMU33-20230

Guidelines and standards

Directive 2014/30/EU	EMC Directive
Directive 2014/35/EU	Low Voltage Directive
Directive 2011/65/EU	RoHS Directive
DIN EN 60529	Protection types through housing
DIN EN 60688	measuring transducer for converting alternating current variables into analog or digital signals
DIN EN 60715	Dimensions of low-voltage switching devices
	Standardized mounting rails for the mechanical fastening of electrical devices in switchgear
DIN EN 61010-1	Safety regulations for electrical measuring, control, regulation and laboratory devices Part 1: General requirements
DIN EN 61326-1	Electrical measuring, control, regulating and laboratory devices - EMC requirements - Part 1: General requirements 61000-4-3 Evaluation criterion B

Safety regulations and general information



- Check the relevant details for installation of the Measuring transducer against the nameplate and the terminal connections to ensure that they are suitable for your area of application.
- The Measuring transducer may only be installed by qualified electricians.
- The Measuring transducer must be checked for transport damage before commissioning and may only be put into operation if it is in perfect condition. In case of safety-relevant damages the device may not be put into operation.



- Ensure that the connections match the terminal connections.
- Circuits must be fused for the maximum permissible currents.
- When commissioning and using the device, the applicable laws, regulations and provisions for the respective area of use and application must be observed.
- The Measuring transducer is not suitable for use in environments with explosive gases or explosive substances.



- The Measuring transducer may only be operated in the environmental and ambient conditions specified in the data sheet. Direct sunlight must be avoided.
- The Measuring transducer may only be installed on non-flammable materials. The applicable fire protection regulations in the area of use and application must be observed.
- Due to the operating voltage, the distance or insulation from other devices must be observed in accordance with the applicable regulations.



- Stranded cables are only permitted if they are fitted with wire end sleeves.
- Connecting cables must be laid away from electromagnetic interference fields.
- Dangerous electrical voltage (more than 75 V DC or more than 50 V AC) can lead to electric shock and burns.
- The Measuring transducer must always be disconnected when fitting, removing, installing, uninstalling or troubleshooting.
- The Measuring transducer is maintenance-free when used as intended.
- Improper use and non-compliance with these safety instructions can lead to serious injury or even death.

Weigel Meßgeräte GmbH

Am Farrnbach 4a
D-90556 Cadolzburg

Telephone: +49 9103 / 62694-0
www.weigel-messgeraete.de
info@weigel-messgeraete.de

Technical changes reserved
(12/2024)